SALUS CONTROLS

ZIGBEE RECEIVER

Model: WQ615RX



MULTI-LANGUAGE MANUAL

Quick Guide

Manufacturer:
SALUS Controls plc, Units 8-10, Northfield Business Park, Forge Way, Parkgate Rotherham, S60 1SD, United Kingdom

Importer:
Salus Controls
European Distribution sp. z o.o.
ul. Szamocka 8, piętro 6.
01 748 Warszawa
Poland

UK: tech@salus-tech.com
DE / NL: info@salus-controls.de
FR: technicalsupport@saluscontrols.fr
RO: tehnic@saluscontrols.ro
DK: Support@salus-controls.dk

www.saluscontrols.com

Computime

SALUS Controls is a member of the Computime Group

In the interests of continuous product development, SALUS Controls plc reserves the right to amend the specifications, design and materials of the products listed in this brochure without prior notice.

CE UKCA RoHS COMPLIANT

10/2026

Introduction

The SALUS WQ615RX receiver is designed for effective management of electric heating systems utilizing the Zigbee protocol. The receiver can be set up as a master unit, allowing it to connect with up to four additional slave receivers, thereby creating a unified and synchronized network for controlling multiple infrared panels. Each WQ615RX receiver can function as either a master or a slave, depending on the system's requirements, ensuring smooth control and integration. This flexibility allows for effortless management of the entire heating or cooling system, improving the efficiency and responsiveness of your setup.

Product compliance


This product complies with the essential requirements and other relevant provisions of the GPSR 2023/988, RED 2014/53, REACH 253 SVHC 1907/2006, RoHS 2015/863 and 2017/2102 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council on the restriction of the use of certain hazardous substances in electrical and electronic equipment. The full text of the EU Declaration of Conformity is available at the following web address: www.saluslegal.com.

2405-2480MHz; <14dBm


Safety information

Please observe the applicable national and EU regulations. Use the appliance for its intended purpose and store it in a dry place. The product is intended for indoor use only. Installation must be carried out by a qualified professional in accordance with the applicable national and EU regulations.

Button description

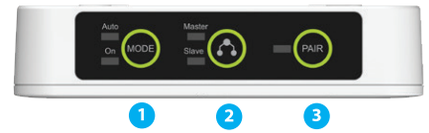

Wiring diagram

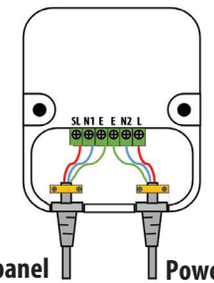

Infrared panel — Power supply

Pairing procedure

Note: The WQ615TX thermostat comes prepaired with the WQ615RX receiver, which can also be linked to an additional 4 more receivers (5th slave will be rejected), all connected to infrared heating panels. To start a new pairing process, it is necessary to factory reset the devices.




1. Power up the receiver.
   Note: Firmware version will flash red, then green.
2.
3. Press and hold the PAIR button for 10 seconds to perform a factory reset.




4. The PAIR LED will show solid red for 5 seconds then will start flashing red.
5. Receiver resets.
6. Short press the Master/Slave button to change to Master.



7. Press and hold the PAIR button for 5 seconds to start pairing the master receiver.
8. Master LED and PAIR LED will both flash green.
9. Go to "Pair with receiver"

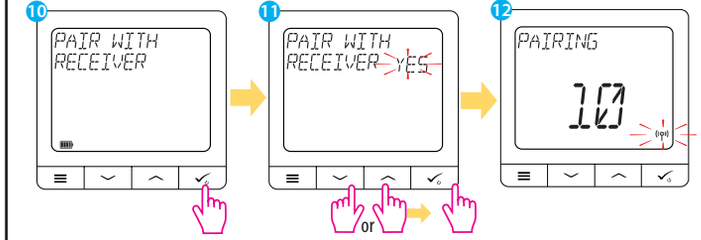

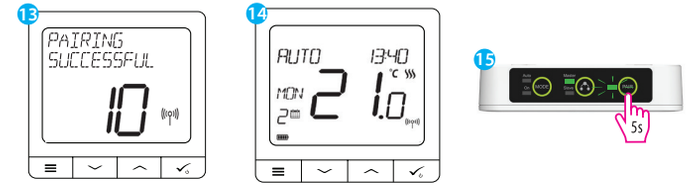


13.
14. The thermostat will go to the home screen.
15. Press and hold the PAIR button for 5 seconds to close receiver pairing.




16. Both PAIR and Master LEDs show solid green. Master receiver is now paired.


If never paired or factory reset

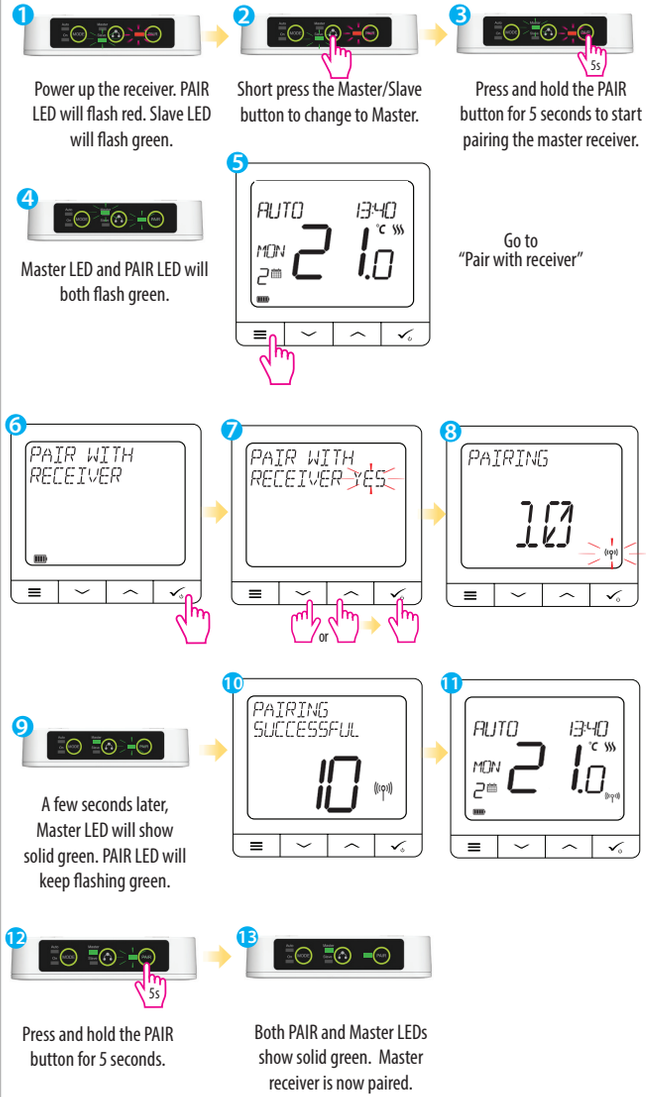

Wiring diagram

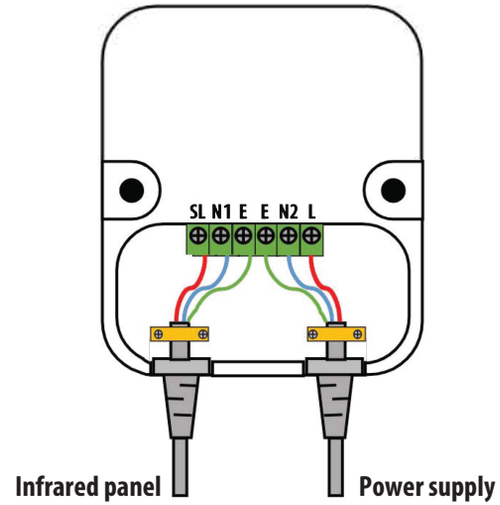

Dimensions

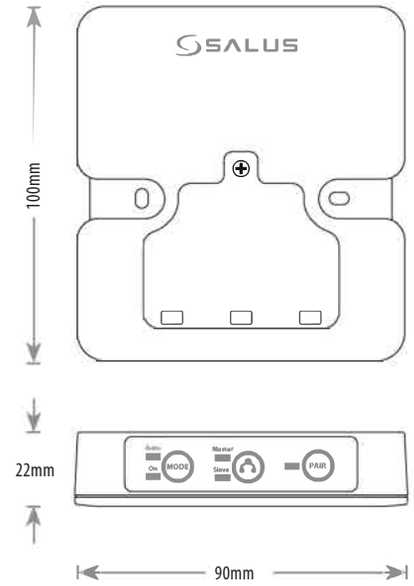

Technical specifications

Power supply	230V AC 50Hz
Connectivity	**Local comm. via ZigBee 2.4 GHz**
Rating max	10(5)A
Operating temperature	0°C **to** +50°C
Storage temperature	-20°C **to** +60°C
Outputs	230V SL
Ingress protection rating	IP54
Radio frequency	2.4 GHz
Material (Housing)	**White, Gloss plastic**
Safety approval	**Class II**
Dimensions	90mm(W) x 100mm(h) x 22mm (D)

Other perspectives

